



Art-Nr.: UER3067

D · A · H · M · S
industrial components

UR 3067 Unter- /Überspannungsmessrelais

Sizes:


Dimension (BxHxT mm): 17,8 x 90,0 x 76,5, incl. snap foot

Technical Data:

General technical Data:

ambient temperature:	-25 - +60 °C
connection voltage:	230/400 VAC 3~/N
power consumption:	< 1 VA
Output:	2 changeover contacts, potential-free
switching voltage (max.):	250 VAC / 30 VDC
switching current (max.):	5 A
protection rating:	Enclosure IP 40
Dimension (BxHxT mm):	17,8 x 90,0 x 76,5, incl. snap foot
Type-Name:	UR
connections:	finely stranded 2,5 mm ² , solid 4 mm ²
rated operating power:	approx. 3 VA
Setting range of the setpoint:	U > 242 - 275,5VAC
Setting range of the setpoint:	U < 150 - 220 VAC
response time:	0,5 s
switching hysteresis:	approx. 5 %
dielectric strength:	4 kV AC 50/60 Hz, between coil and contact
dielectric strength:	1 kV AC 50/60 Hz, open contact
mounting:	Mounting rail 35 mm, for DIN rail to IEC/EN 60715
Permissible Tolerance:	70%...110% UN
Type number:	3067
frequency:	50 Hz
Display:	LED

Technical images:

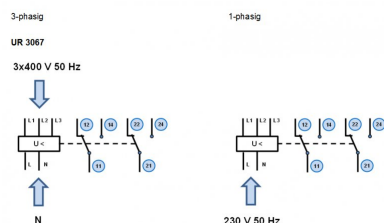

Contact

Dahms GmbH Max-Keith-Straße 66 45136 Essen Telefon: 0201 - 890885-0 E-Mail: dahms@dahms-gmbh.de